

PRISMA

CERAMIC WALL TILES



eliane

PRISMA

CERAMIC WALL TILES

Prisma Off White



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Marfim



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Gris



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Greige



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Hijau



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Matcha



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Veggie



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Cosmic



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Cotto



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Rosé



7x25 cm | 3"x10"
BR (GLOSSY)

Prisma Coral



7x25 cm | 3"x10"
BR (GLOSSY)



WALLS



FIRE PROOF



VOC FREE

PRISMA

CERAMIC WALL TILES

SIZES AND PACKING

Type / Size	Finish	Rectified	Unit	Work Size	Thick	Sqft/ Faces	Pieces/ Carton	Carton
Wall Tiles 3"x10"	BR (Glossy)	No	SF	70 x 250 mm 3" x 10"	7.0 mm	100	5.60	30

INSTALLATION AND CARE

Grout Joint Recommendation: 1/16"

Shade Variation: V3

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

Eliane recommends using a cloth with water and a neutral cleaner (soap less) or a general household cleaner for wall tiles cleaning.

USAGE RECOMMENDATION

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (Including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes - Interior (Residential or Commercial)	N/A	✓
Countertops	N/A	
Facades	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

QUALITY

WARRANTY

Standard quality tiles manufactured by Eliane Ceramic Tiles meet or exceed ISO 13006 and ANSI A137.1 standards.

VOC FREE


Eliane ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

FIRE PROOF

Our ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	≤ 20%
Breaking Strength	C648	≥ 125 lbs
DCOF WET	ANSI A137.1 ANSI A326.3	N/A
Scratch Hardness	MOHS	4
Frost Resistance	C1026	No
Chemical Resistance	C650	Class A
Stain Resistance	C1378	Class A

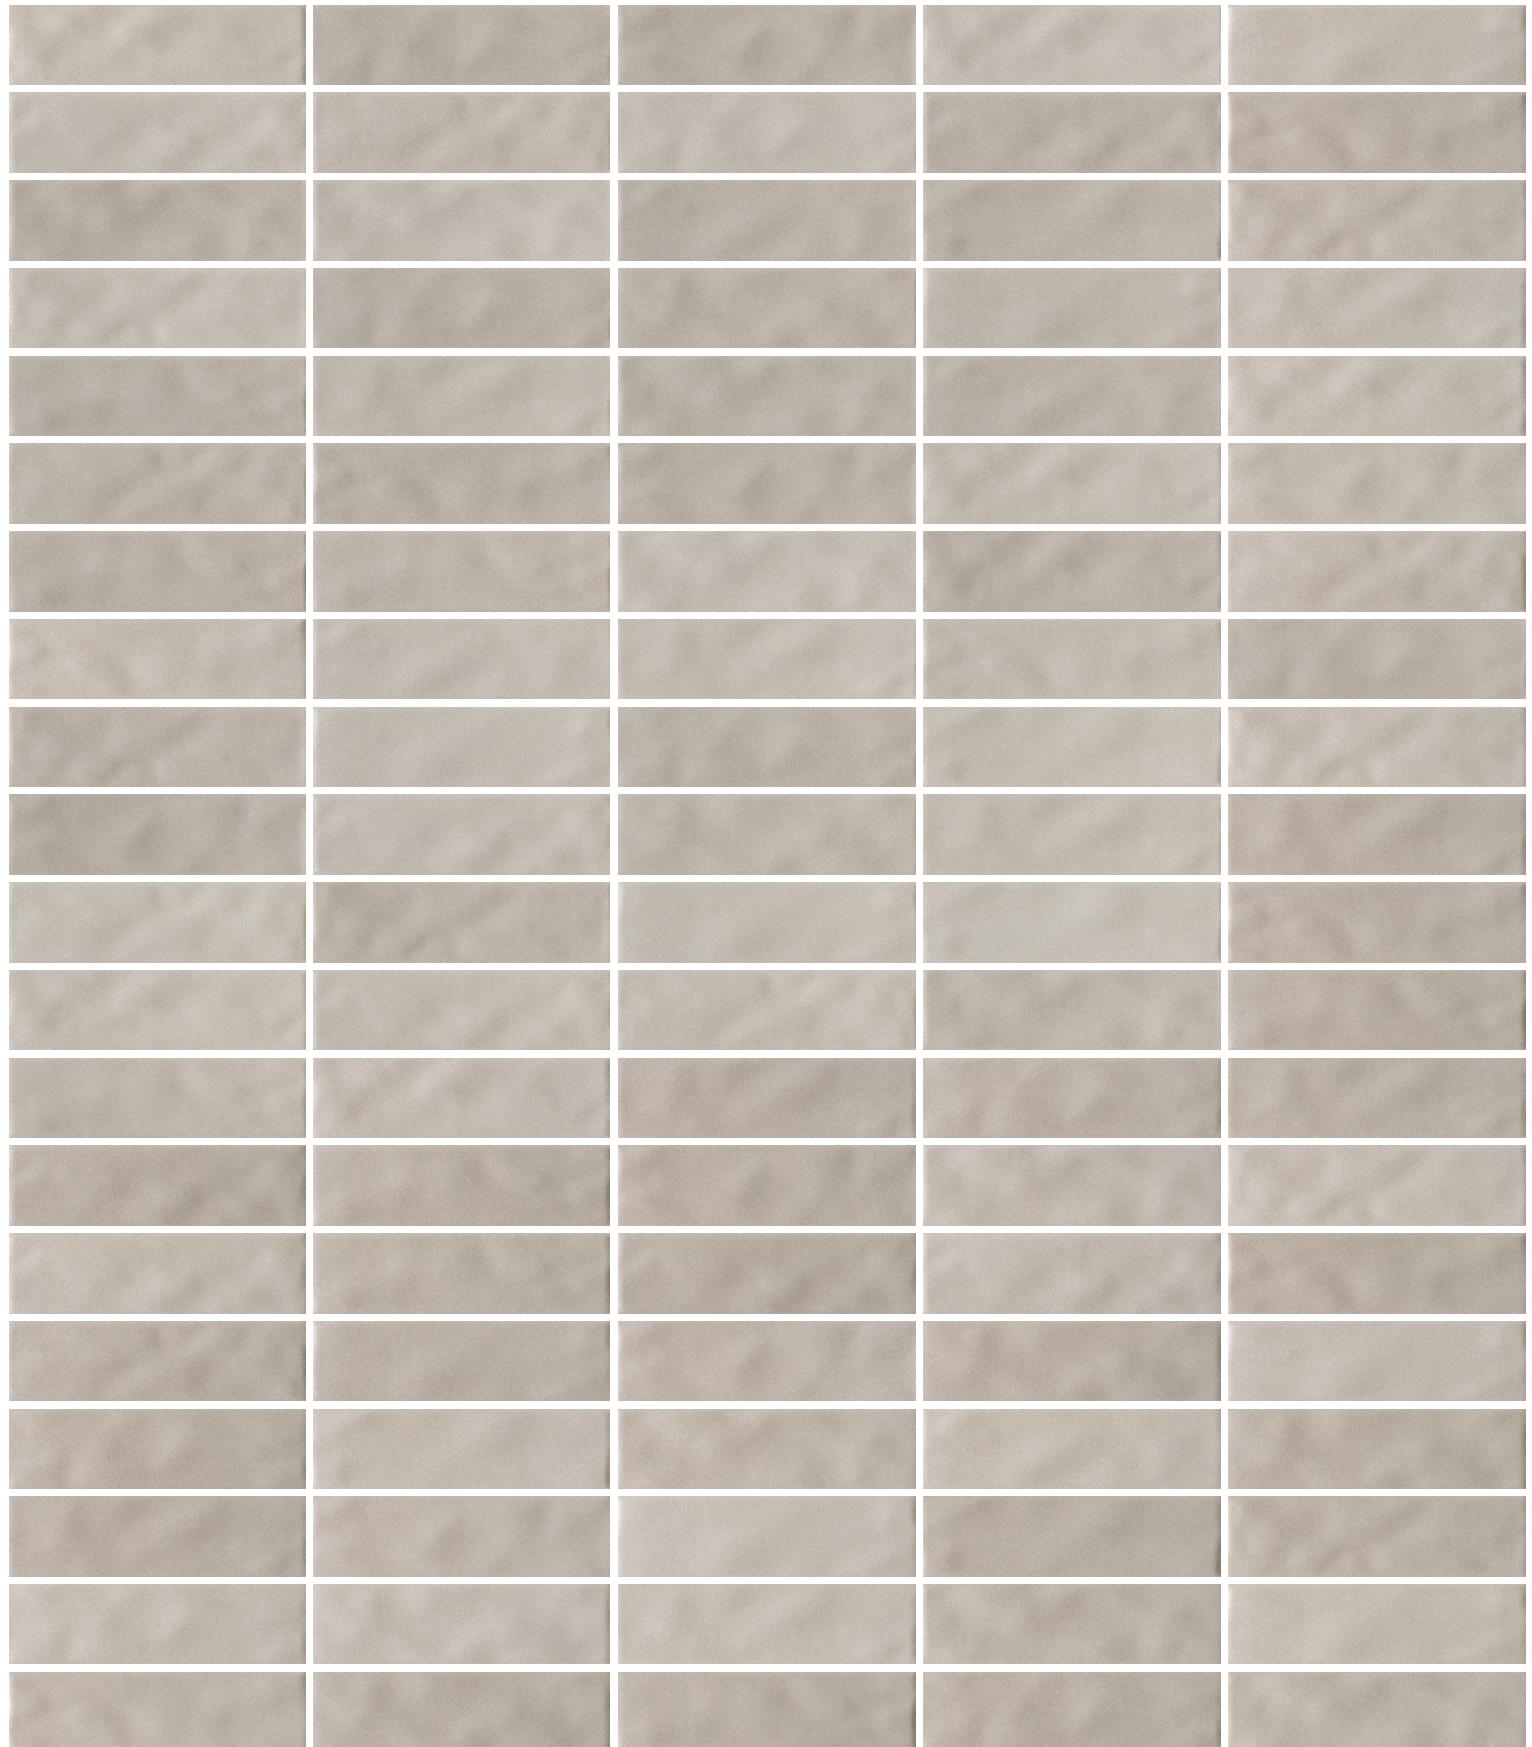

FACES - PRISMA GRIS BR