


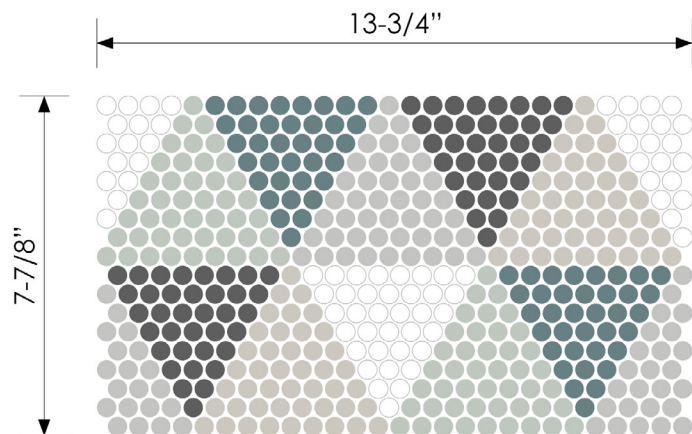

FORMAT	MOSAIC		MATERIAL	RECYCLED GLASS	
PART NUMBER	GLSGEOHYGGLOG		FINISH	MATTE RECTIFIED	
DIMENSIONS	7-7/8" X 13-3/4"		SF PER SHEET / BOX	0.75 / 7.50	
THICKNESS	6.35mm (1/4")		UOM	SF (SOLD BY CASE)	
CASE QTY	10 PCS		PRIMARY COLORS	CHALK, THYME, CASCADE, FROST GRAPHITE, ASH	
BREAKING STRENGTH	519 LBF	(ASTM C648-04) (2014)	WATER ABSORPTION	AVERAGE 0.0%	(ASTM C373-18)
DCOF	> 0.42	(ANSI A326.3) (2017)	FROST RESISTANT	RESISTANT	(ASTM C1026-13) (2018)
MOHS HARDNESS - EN101	5	(ASTM C1895-20)	CHEMICAL RESISTANCE	CLASS A	(ASTM C650-20)
VISIBLE ABRASION	< 1500 RPM	(ASTM C1027-19)	STAIN RESISTANT	CLASS A	(ASTM C1378-20)

APPLICATIONS

COMMERCIAL, RESIDENTIAL, EXTERIOR, INTERIOR, FLOORS, WALLS, BATH FLOORS, BATH WALLS, POOLS & SPAS, FULL SUBMERSION

WARNING: READ PRIOR TO INSTALLATION:

Natural stones are products of nature and are prone to variations in color, texture, shading and veining that may differ from displays. Variations are not considered flaws as no two pieces of stone are alike. Prior to installation, ensure enough material, including waste is purchased for the entire project. Mix product from various cartons, and lay out all tiles and coordinating pieces to ensure optimal blending prior to installation. Natural stone products should be sealed prior to grouting. NO CLAIMS WILL BE ACCEPTED AFTER THE MATERIAL HAS BEEN INSTALLED

FOR MORE INFO, PLEASE CONTACT CSR@NSRSTONE.COM

1800 East Via Burton St, Anaheim, CA 92806 | P. 714.821.5400 | F. 714.821.3700 | nsrstone.com